
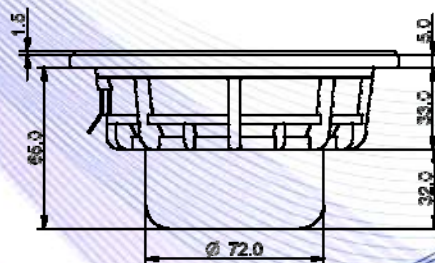


- 1,5" voice coil Kapton former and aluminium winding
- Neodymium magnet
- Rubber surround with DAR technology
- Ventilated voice coil to reduce power compression
- 89.4 dB sensitivity

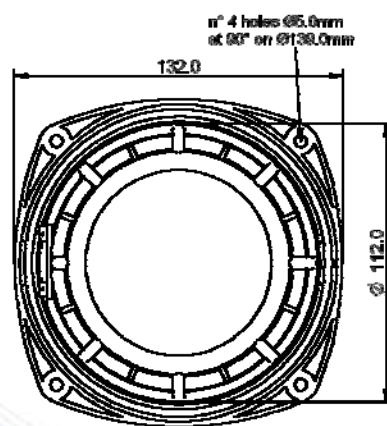


Specifications	
Nominal Diameter	132mm (5")
Nominal Impedance	4Ω
Rated Power AES ⁽¹⁾	100W
Continuous Program Power ⁽²⁾	200W
Sensitivity @ 1W/1m ⁽³⁾	89.4dB
Voice Coil Diameter	38mm (1,5")
Voice Coil Winding Depth	12mm
Magnetic Gap Depth	6mm
Flux Density	1.02T
Magnet Weight	98g
Net Weight	0.8kg

Thiele & Small Parameters ⁽⁴⁾			
Re	3.14Ω	Fs	59.8Hz
Qms	4.90	Qes	0.37
Qts	0.34	Mms	8.4g
Cms	843μm/N	Bxl	5.20Tm
Vas	7.4l	Sd	78.5cm ²
X max ⁽⁵⁾	+/-3.8mm	X var ⁽⁶⁾	+/-6.2mm
η ₀	0.41%	Le (1kHz)	0.19mH

Constructive Characteristics	
Magnet	: Neodymium
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Aluminium
Voice Coil Former Material	: Kapton
Cone Material	: Paper
Cone Treatment	: No
Surround Material	: Rubber
Dust Dome Material	: Treated Cloth

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

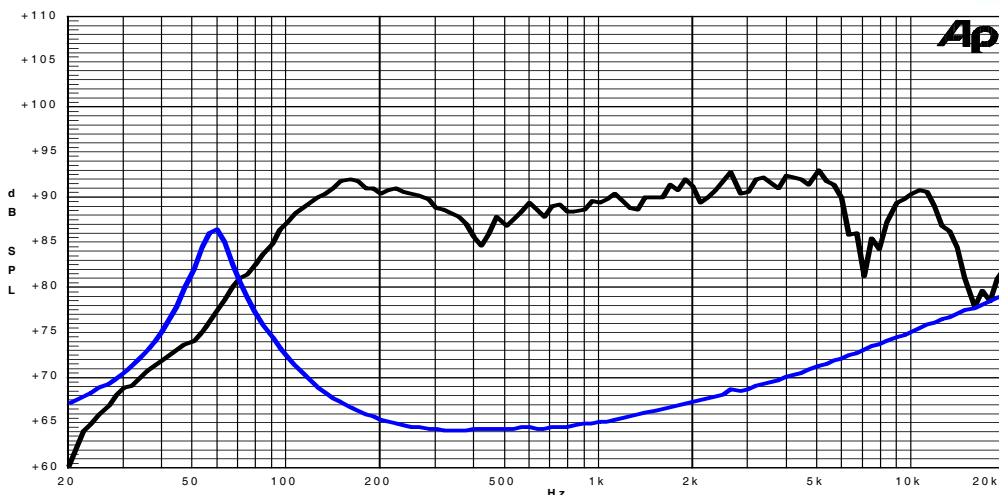

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle